




CN-2V 1500AH Lead acid battery



Technology data

Rated voltage	Capacity (10hr,1.80V/Cell)	Weight	Max discharge current	Max charging current	Self-discharge (25°C)	Recommended Using temperature	Cover Material
2V	1500Ah	92Kg	30I ₁₀ A(3min)	≤0.25C ₁₀	≤3%/month	15°C~25°C	ABS
Using temperature	Charging Voltage (25°C)	Charging Mode (25°C)		Cycle life		Capacity Affected by Temperature	
Discharge: -45°C~50°C	floating charge:	Float Charge: 2.275±0.025V		100%DOD 572 times		105% @ 40°C	
Charge: -20°C~45°C	2.25V-2.3V	Temperature parameters: ±3mV/°C		50%DOD 1422 times		90% @ 0°C	
Storage: -30°C~40°C	equalizing charge:	Cycle Charge: 2.45±0.05V		30%DOD 2218 times		70% @ -20°C	
	2.35V-2.4V	Temperature Compensation Coefficient					
		±5mV/°C					

Features

battery, Maintenance free and easy to use,Contemporary advanced technology research and development of new high-performance batteries,It can be widely used in solar energy , wind energy, telecommunication systems, off-grid systems, UPS and other fields. The designed life for the battery could be eight years up for float use.

Different discharge time at different terminal Voltage, discharge time(Amps,25)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h
1.60V	2576	2182	2060	1576	1194	960	579	423	341	287	198	163
1.65V	2273	2003	1939	1454	1143	915	564	414	334	282	195	160
1.70V	2182	1890	1848	1333	1071	864	543	402	327	278	192	158
1.75V	2079	1793	1751	1242	1023	831	525	390	318	270	189	154
1.80V	2000	1701	1651	1182	951	777	501	378	306	264	184	150
1.85V	1770	1507	1463	1070	861	702	453	357	293	252	178	146

Certificate

ISO9001

CE

Compliant standards:

GB/T 22473-2008

GB/T 19638.2-2005

YD/T799-2002

IEC61427-2005

GB/T 19001-2016 idt ISO 9001:2015

EN IEC 61000-6-2:2019,EN IEC 61000-6-4:2019

EN IEC 61000-3-2:2019+AI:2021


EN 61000-3-3:2013+AI:2019




Performance characteristics

NOTE: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.


Charge Characteristic

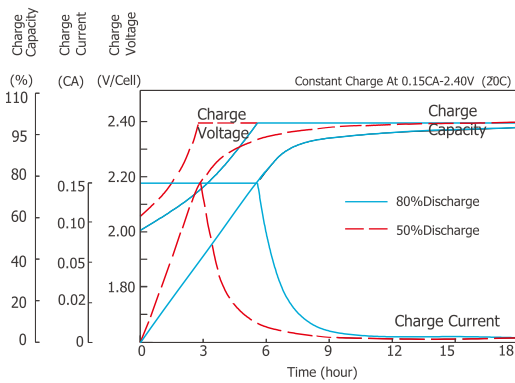


Discharge Characteristic (20°C)

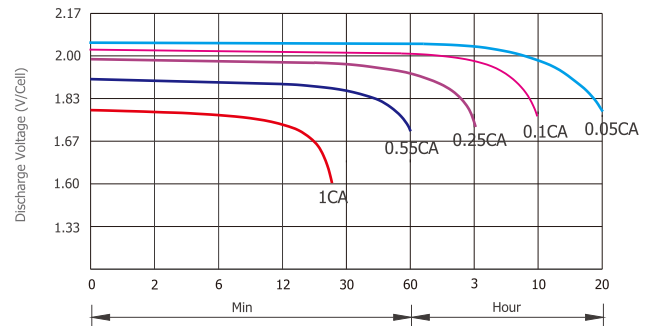


Temperature vs Float Life

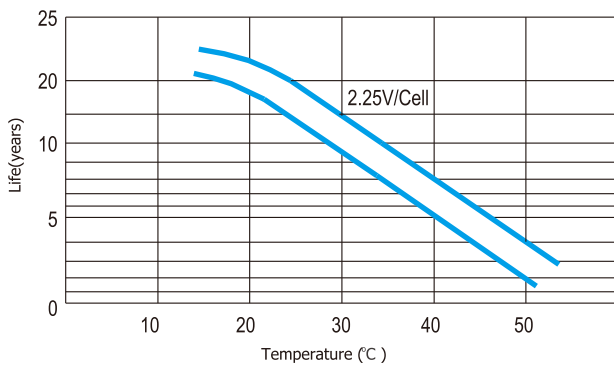

Self Discharge Characteristics

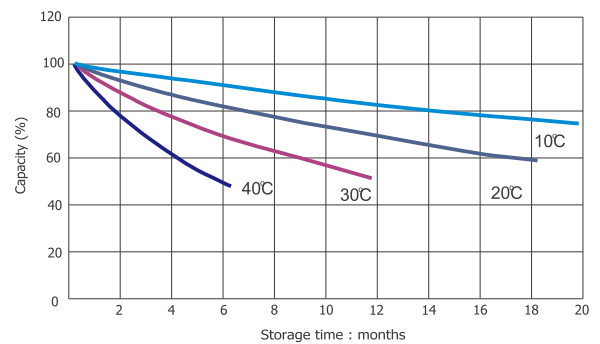

Cycle Life vs Depth of Discharge

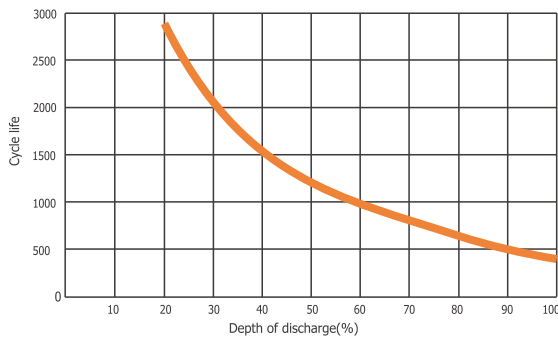

Capacity vs Temperature

