
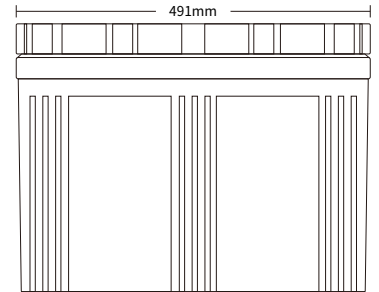



CN-2V 2000AH Lead acid battery



Technology data

Rated voltage	Capacity (10hr,1.80V/Cell)	Weight	Max discharge current	Max charging current	Self-discharge (25°C)	Recommended Using temperature	Cover Material
2V	2000Ah	121Kg	30I ₁₀ A(3min)	≤0.25C ₁₀	≤3%/month	15°C~25°C	ABS
Using temperature	Charging Voltage (25°C)	Charging Mode (25°C)		Cycle life		Capacity Affected by Temperature	
Discharge: -45°C~50°C	floating charge:	Float Charge: 2.275±0.025V		100%DOD 572 times		105% @ 40°C	
Charge: -20°C~45°C	2.25V-2.3V	Temperature parameters: ±3mV/°C		50%DOD 1422 times		90% @ 0°C	
Storage: -30°C~40°C	equalizing charge:	Cycle Charge: 2.45±0.05V		30%DOD 2218 times		70% @ -20°C	
	2.35V-2.4V	Temperature Compensation Coefficient ±5mV/°C					

Features

battery, Maintenance free and easy to use,Contemporary advanced technology research and development of new high-performance batteries,It can be widely used in solar energy , wind energy, telecommunication systems, off-grid systems, UPS and other fields. The designed life for the battery could be eight years up for float use.

Different discharge time at different terminal Voltage, discharge time(Amps,25)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h
1.60V	3005	2545	2404	1838	1592	1280	772	564	455	383	264	217
1.65V	2651	2337	2262	1697	1524	1220	752	552	445	376	260	214
1.70V	2545	2205	2156	1555	1428	1152	724	536	436	371	256	210
1.75V	2425	2092	2043	1449	1364	1108	700	520	424	360	252	206
1.80V	2333	1984	1927	1379	1268	1036	668	504	408	352	245	200
1.85V	2064	1758	1707	1248	1148	936	604	476	390	336	238	194

Certificate

ISO9001

CE

Compliant standards:

GB/T 22473-2008

GB/T 19638.2-2005

YD/T799-2002

IEC61427-2005

GB/T 19001-2016 idt ISO 9001:2015

EN IEC 61000-6-2:2019,EN IEC 61000-6-4:2019

EN IEC 61000-3-2:2019+AI:2021


EN 61000-3-3:2013+AI:2019




Performance characteristics

NOTE: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.


Charge Characteristic

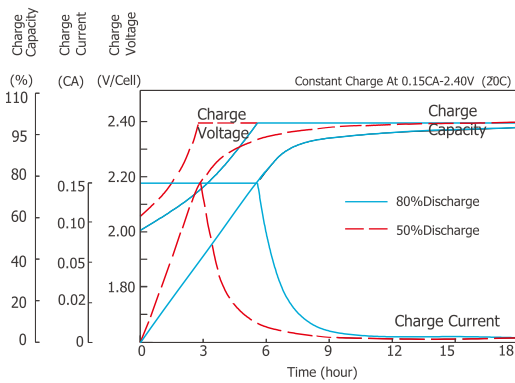


Discharge Characteristic (20°C)

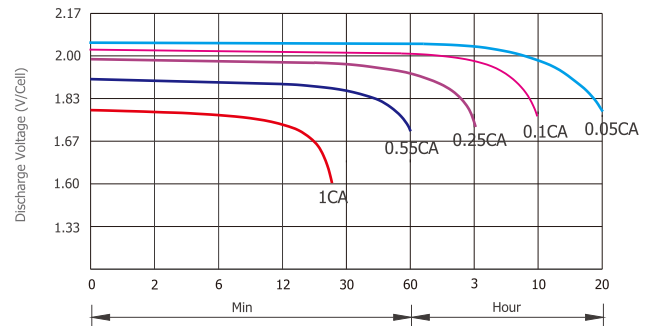


Temperature vs Float Life

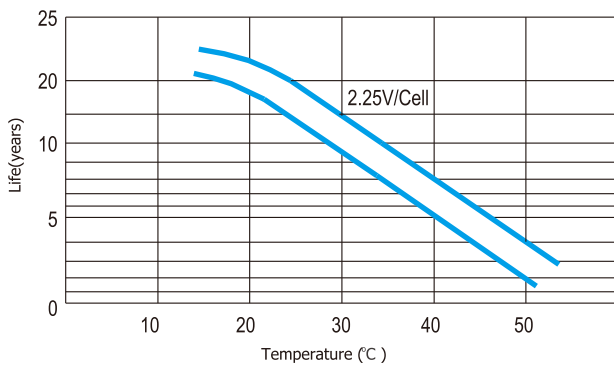

Self Discharge Characteristics

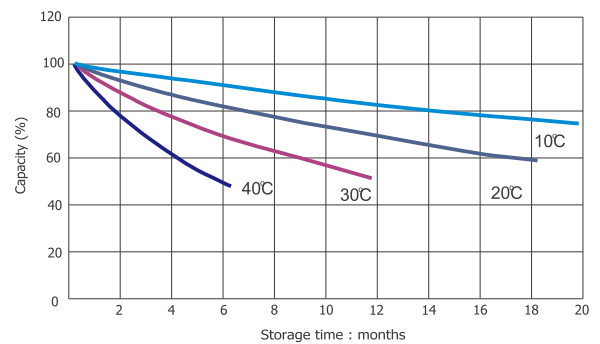

Cycle Life vs Depth of Discharge

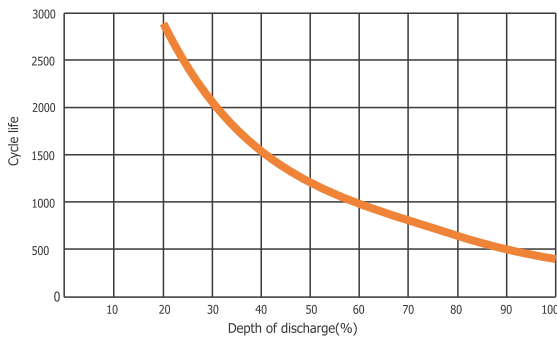

Capacity vs Temperature

