




CN-2V 400AH Lead acid battery



Technology data

Rated voltage	Capacity (10hr,1.80V/Cell)	Weight	Max discharge current	Max charging current	Self-discharge (25°C)	Recommended Using temperature	Cover Material
2V	400Ah	22.5Kg	30I ₁₀ A(3min)	≤0.25C ₁₀	≤3%/month	15°C~25°C	ABS
Using temperature	Charging Voltage (25°C)	Charging Mode (25°C)		Cycle life		Capacity Affected by Temperature	
Discharge: -45°C~50°C	floating charge:	Float Charge: 2.275±0.025V		100%DOD 572 times		105% @ 40°C	
Charge: -20°C~45°C	2.25V-2.3V	Temperature parameters: ±3mV/°C		50%DOD 1422 times		90% @ 0°C	
Storage: -30°C~40°C	equalizing charge:	Cycle Charge: 2.45±0.05V		30%DOD 2218 times		70% @ -20°C	
	2.35V-2.4V	Temperature Compensation Coefficient ±5mV/°C					

Features

battery, Maintenance free and easy to use,Contemporary advanced technology research and development of new high-performance batteries,It can be widely used in solar energy , wind energy, telecommunication systems, off-grid systems, UPS and other fields. The designed life for the battery could be eight years up for float use.

Different discharge time at different terminal Voltage, discharge time(Amps,25)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h
1.60V	687	582	549	420	318	256	154	113	91.0	76.6	52.7	43.4
1.65V	606	534	517	388	305	244	150	110	89.0	75.2	52.0	42.7
1.70V	582	504	493	356	286	230	145	107	87.2	74.2	51.1	42.1
1.75V	554	478	467	331	273	222	140	104	84.8	72.1	50.5	41.1
1.80V	533	454	440	315	254	207	134	101	81.6	70.4	49.0	40.0
1.85V	472	402	390	285	230	187	121	95.2	78.0	67.2	47.5	38.8

Certificate

ISO9001

CE

Compliant standards:

GB/T 22473-2008

GB/T 19638.2-2005

YD/T799-2002

IEC61427-2005

GB/T 19001-2016 idt ISO 9001:2015

EN IEC 61000-6-2:2019,EN IEC 61000-6-4:2019

EN IEC 61000-3-2:2019+AI:2021


EN 61000-3-3:2013+AI:2019




Performance characteristics

NOTE: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.


Charge Characteristic

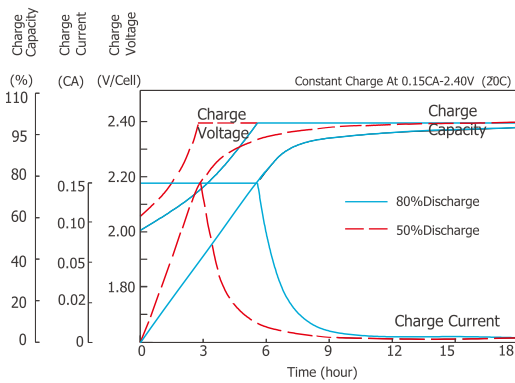


Discharge Characteristic (20°C)

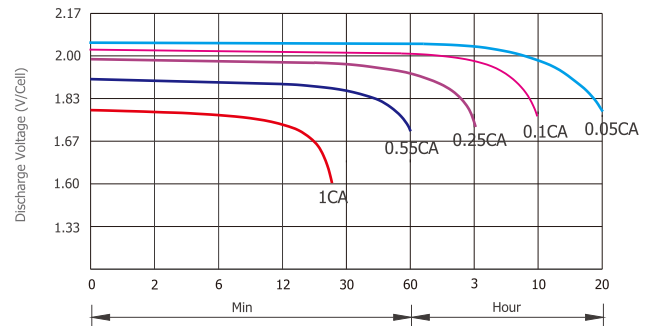


Temperature vs Float Life

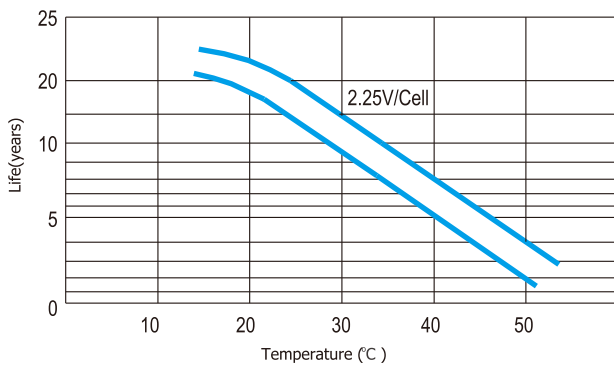

Self Discharge Characteristics

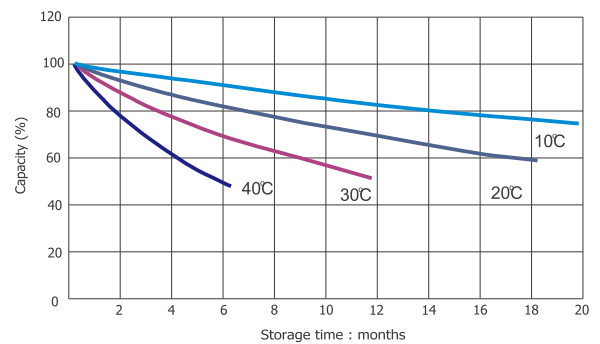

Cycle Life vs Depth of Discharge

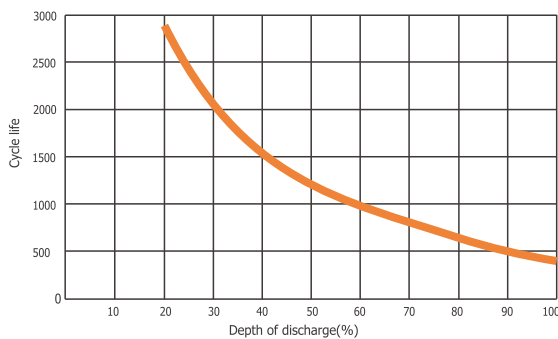

Capacity vs Temperature

